

INSTRUCTION & SERVICE MANUAL

E2xB10UL BEACONS

For Use In Hazardous Locations

- 10 Joules
- IP Rating
- Operating Temperature Range
- -20°C to +55°C (+40°C for 120V AC)



Unit Type No. E2xB10UL

Input Voltages: DC Units 24V or 48V
AC Units 120V or 230V 50/60Hz


Max. Oper. Temp. / Code at +55° Ambient	
Hazardous Location	Temperature Code
Class I, Division 2, Groups A, B, C, D	T2A (280°C)
Class II, Division 2, Groups F and G	T4A (120°C)
Class III, Divisions 1 and 2	T4A (120°C)

Max. Operating Temperature / Code at +40° Ambient	
Hazardous Location	Temperature Code
Class I, Division 2, Groups A, B, C, D	T2A (280°C)
Class II, Division 2, Groups F and G	T5 (100°C)
Class III, Divisions 1 and 2	T5 (100°C)

The equipment is suitable for use in the hazardous locations listed above or non-hazardous locations only.

PRE-INSTALLATION

WARNING - The E2xB10UL beacon is supplied with flying leads so it should not be necessary to open the unit before it is installed.

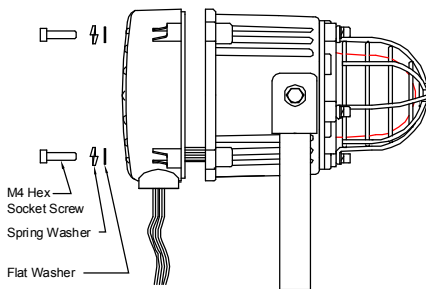


WARNING – NOT TO BE USED AS A VISUAL PUBLIC MODE NOTIFICATION APPLIANCE

WARNING – HIGH VOLTAGE SHOCK HAZARD. WAIT 5 MINUTES AFTER REMOVING POWER BEFORE OPENING THE ENCLOSURE

MOUNTING

The E2xB10UL beacon must be mounted using the rotating bracket as shown.

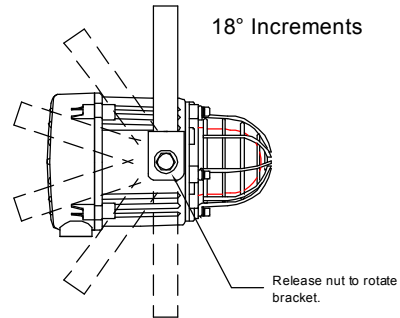

WARNING - EXPLOSION HAZARD - SUBSTITUTION OF COMPONENTS MAY IMPAIR SUITABILITY FOR CLASS I, II DIVISION 2.

WIRING INSTALLATION


The E2xB10UL beacon has one ½ NPT cable entry, the blanking plug adjacent to the cable entry is permanently fixed and must not be removed. The beacon is pre-wired with flying leads which are colour coded and should be connected as shown in the diagram below.

The conduit running from the supply to the beacon must include an equipment grounding conductor that is at earth potential to facilitate ground connection of the device. A number of beacons can be connected in a chain to the same supply using field installed wiring compartments that are appropriate for the hazardous location, provided that the conductor at earth potential can be readily connected to the ground lead on each beacon in the chain.

WARNING - ALL ELECTRICAL WIRING MUST BE INSTALLED IN ACCORDANCE TO THE NATIONAL ELECTRICAL CODE


AC BEACONS

Black Live
White Neutral
Green/Yellow Ground

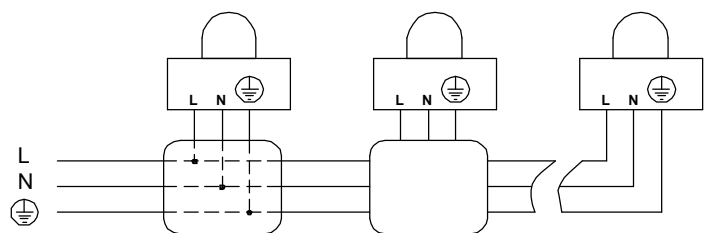

DC BEACONS

Red Positive
Black Negative
Green/Yellow Ground

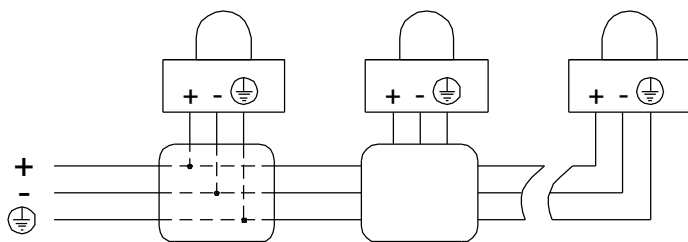

POWER SUPPLY SELECTION

It is important that a suitable power supply is used to run the beacons. The power supply selected must have the necessary capacity to provide the input current to all of the beacons connected to the system.

Unit Type	Input Voltage	Input Current	Max. I/P Volts
E2xB10UL	24V DC	560mA	30V
E2xB10UL	48V DC	260mA	58V
E2xB10UL	230V 50/60Hz AC	107mA	253V
E2xB10UL	120V 50/60Hz AC	185mA	132V